



SERRAS CIRCULARES DE CERMET E TCT



CERMET SHARK



SERRA CIRCULAR CERMET

- Aplicação: Corte de materiais com baixo e médio carbono
- Equipamento aplicado: máquina de serra automática
- Parâmetro mínimo e máximo:
V = 100-140 m/min
Sz = 0.05-0.1 mm

D	B/b	d	Z
250	2.0/1.7	32/40	54/60/72/80
285	2.0/1.7	32/40	60/72/80
285	2.0/1.75	32/40	60/72/80
315	2.25/2.0	32/40/50	60/72/80
360	2.6/2.25	40/50	60/80/100
425	2.7/2.25	50	40/60/80/100
460	2.7/2.25	50	40/60/80/100
520	3.5/3.0	50	60/80
560	3.5/3.0	80	60/80
630	3.6/3.0	80	60/80



CERMET FOX



SERRA CIRCULAR CERMET PARA TUBOS

- Aplicação: Corte de tubos de baixo e médio carbono
- Equipamento aplicado: máquina de serra automática
- Parâmetro mínimo e máximo:
V = 100-200 m/min
Sz = 0.03-0.06 mm

D	B/b	d	Z
250	2.0/1.7	32/40	100
285	2.0/1.7	32/40	100/120
285	2.0/1.75	32/40	100/120
315	2.25/2.0	32/40/50	100/110/120
360	2.6/2.25	32/40/50	100/120/140
420	2.7/2.4	32/40/50	100/120/140
460	2.7/2.25	50	100/120/140
520	2.7/2.25	50	100/130/150



TCT SPIDER


SERRA CIRCULAR TCT COM REVESTIMENTO



- Aplicação: Corte de material temperado com média e alta dureza.
- Equipamento aplicado: máquina de serra automática
 - Tipos de materiais para corte: Inox, Titanium, Aço Temperado, etc.
 - Parâmetro mínimo e máximo: V = 50-80 m/min | Sz = 0.04-0.06 mm

D	B/b	d	Z
250	2.0/1.7	32/40	54/60/72/80
285	2.0/1.7	32/40	60/72/80
285	2.0/1.75	32/40	60/72/80
315	2.5/2.25	32/40/50	60/72/80
360	2.6/2.25	32/40/50	60/80/100
425	2.7/2.25	50	40/60/80/100
460	2.7/2.25	50	40/60/80/100
520	2.9/2.5	50	80/100/120



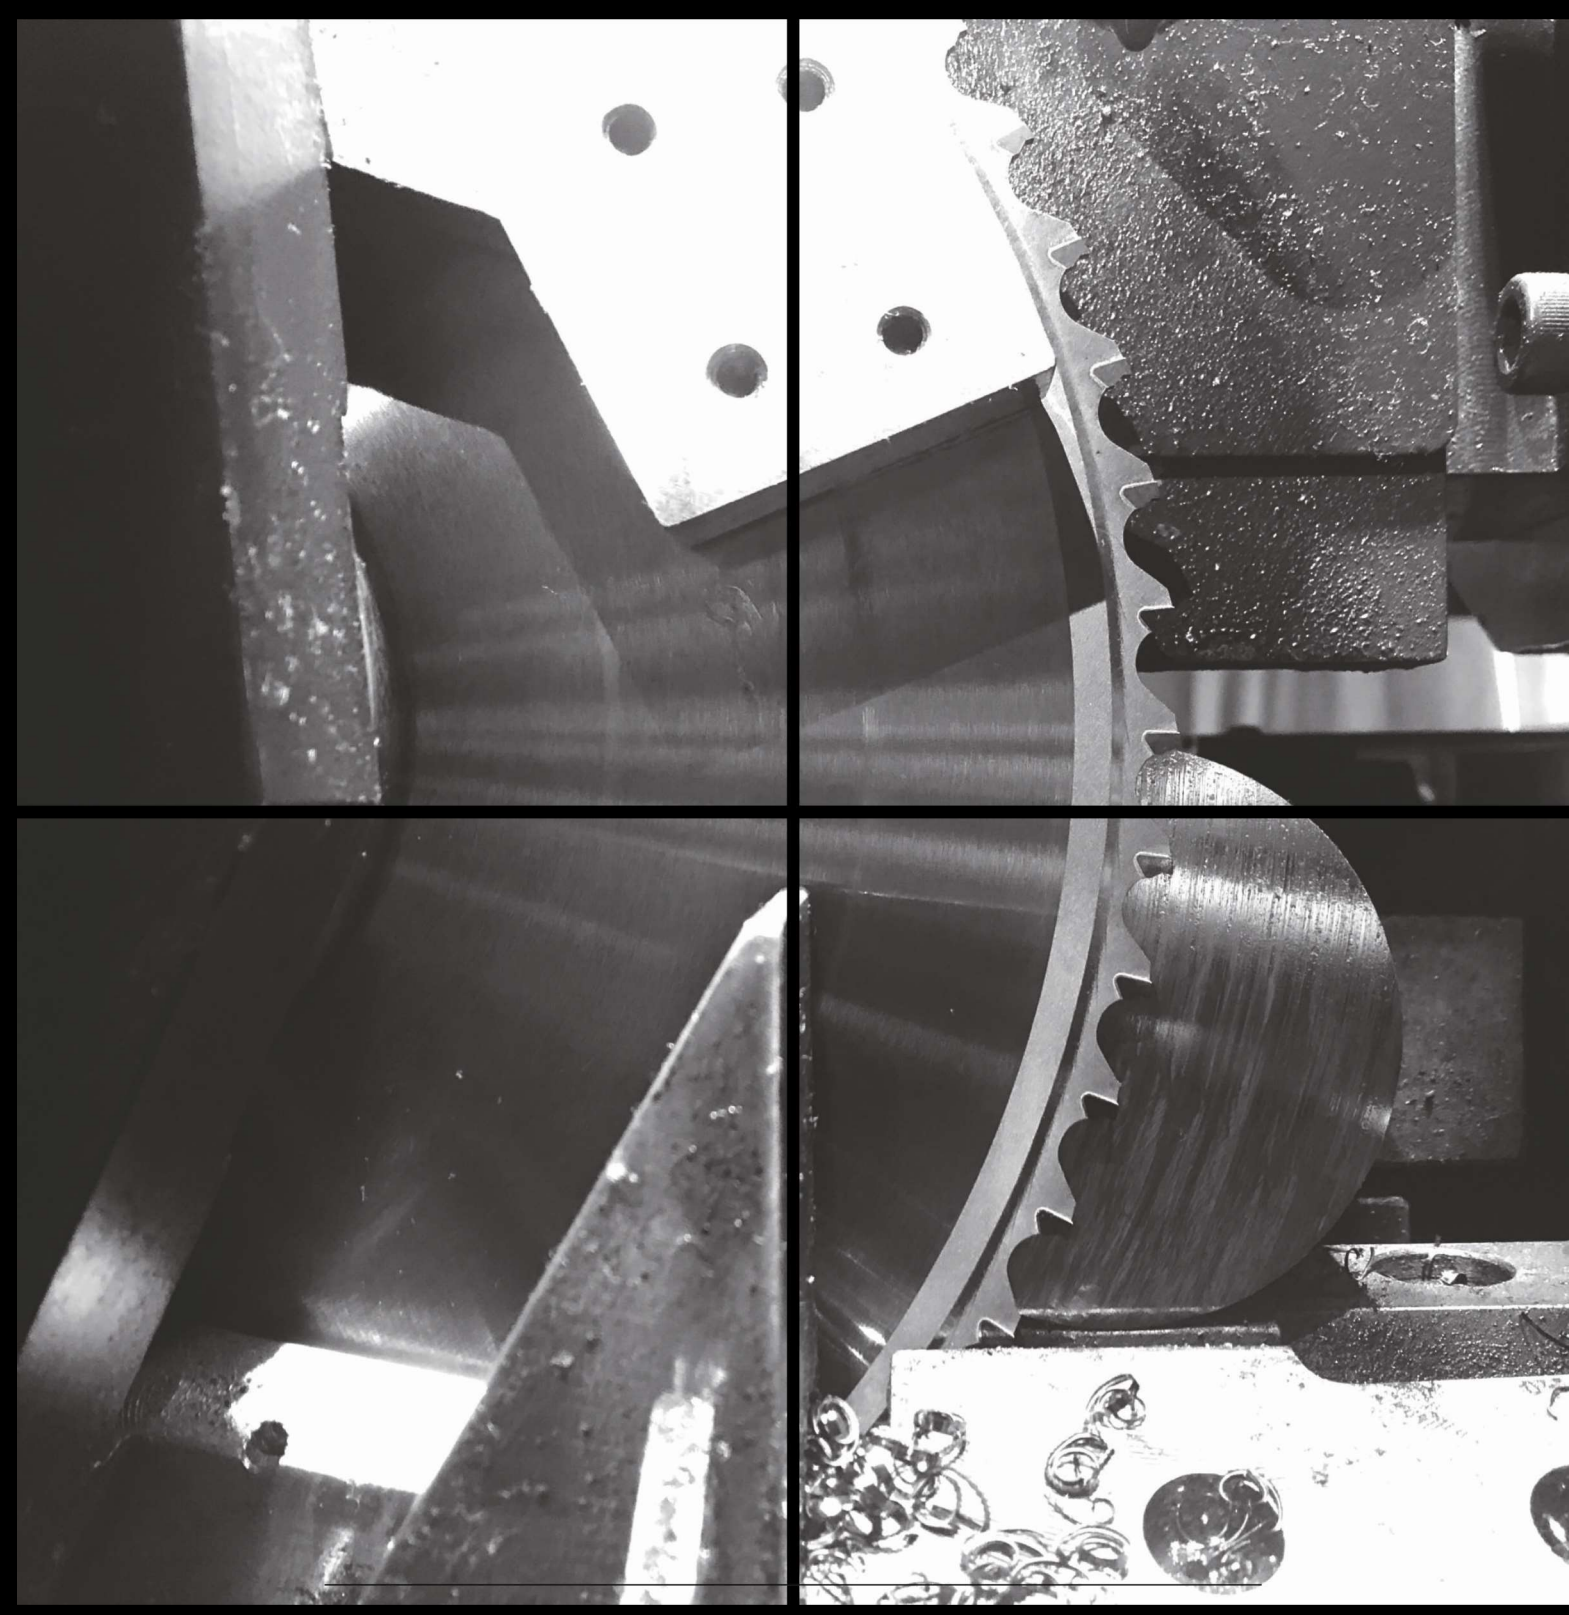

DISERRAÇO DISTR. DE SERRAS DE AÇO LTDA

Avenida Joinville, 395

Jardim Laranjeiras

Limeira - SP

(19) 3443-4838

(19) 3444-7783

vendas@diserraco.com.br



www.diserraco.com.br